



Electric Stacker — CL15JB





PRODUCT FEATURES

1. Reinforcing ribs are set between the internal and external masts to ensure that the mast will not tilt forward when the load is raised, and the vehicle stability is better.
2. German original imported waterproof micro switch, dustproof, hermetic, sturdy and other harsh environments.
3. Key switch, electronic meter, up and down button, turtle speed switch are integrated in the operation handle, easy to operate.
4. The operation handle is equipped with a high-quality air pressure spring, releasing the handle will automatically reset slowly.
5. The operation handle is a vertical type walking system, in line with ergonomic principles, comfortable operation.
6. Side drive design, effectively reduce the operation channel, small turning radius, better vision, suitable for narrow lane operations.
7. Maintenance-free batteries do not need to be replaced with water frequently, it is more convenient.

SPECIFICATIONS

DESCRIPTION	UNIT	CL15JB
GENERAL		
1.1 Capacity	lbs	3,300
1.2 Load center	in	24.0
1.3 Power type		Electric
1.4 Operator type		Walkie
1.5 Wheelbase	in	37.8
WEIGHT		
2.1 Service weight (with battery)	lbs	781
2.2 Axle load, laden front/rear	lbs	1,036 / 1,045
2.3 Axle load, unladen front/rear	lbs	349 / 432
WHEELS, CHASSIS		
3.1 Tires (drive / load)		Polyurethane / Polyurethane
3.2 Drive wheel size	in	Φ8.3 x 2.9
3.3 Load wheel size	in	Φ3.3 x 3.3
3.4 Balance wheel size	in	Φ4.7 x 2.0
3.5 Wheels, number (x=drive)		1 x + 2 / 4
3.6 Tread width, front	in	21.7
3.7 Tread width, rear	in	15.7
DIMENSIONS		
4.1 Lowered mast height	in	78.0
4.2 Lift height	in	118.1
4.3 Extended mast height	in	142.1
4.4 Overall length	in	70.9
4.5 Overall width	in	32.7
4.6 Fork size (l x w x l)	in	1.6 x 4.3 x 45.3
4.7 Fork outside width	in	21.7
4.8 Ground clearance, center of wheelbase	in	1.6
4.9 Aisle width for pallets 39.4" x 47.2" (1000 x 1200 mm)	in	81.1
4.10 Aisle width for pallets 47.2" x 47.2" (1200 x 1200 mm)	in	86.2
4.11 Turning radius	in	53.2
PERFORMANCE		
5.1 Travel speed, laden / unladen	mph	2.5 / 3.4
5.2 Max. gradeability, laden / unladen	%	6 / 12
5.3 Service brake		Electromagnetic
ELECTRICAL		
6.1 Drive motor rating	hp	0.75
6.2 Lift motor rating	hp	0.80
6.3 Battery voltage / nominal capacity	V / Ah	24 / 65
6.4 Battery weight	lbs	88
OTHER		
7.1 Type of drive unit		DC
7.2 Sound pressure level at the operator's ear	dB(A)	< 70
7.3 Steering type		Mechanical Steering

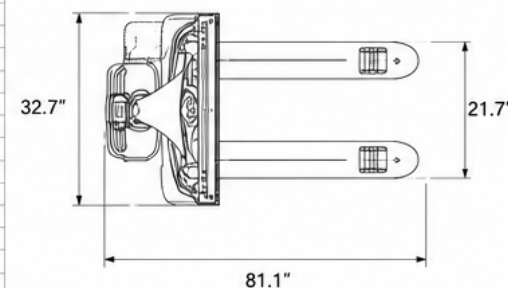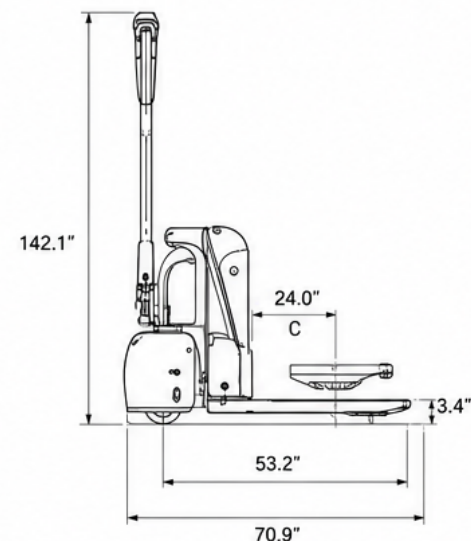

RAL 002
VERMILION



All Pro Alaska
380 E. 54th Ave.
Anchorage, AK 99518

907-338-5438
sales@allproak.com
www.nuforklift.com

CAPACITY



3,300 lbs

MAX LIFT HEIGHT



118.1"

BATTERY



24V / 65Ah